



BRICK & STONE VENEER . TEXTURED PAINT . KASTPANEL . ECES . TEXTURE COATING . PEBBLE STONE COATING



### nuhaus.org

\* Photos of the products shown in this catalogue may vary in color due to lighting condition & printing. We suggest you examine actual product samples before ordering.







ARCHISTRA-E1-2401



# SUZUKA RESUZUKA RESUZ

O1



## ARCHISTRA



## **Features**



Ultra Lightweight



Suitable for the Interior & Exterior (To be used under the roof)



Water Resistant



Easy Installation & DIY Friendly



Anti-mould



Paintable



Anti-termite



Can Be Paired with other Suzuka Coatings



Finished with Green Coating



Made in Malaysia

## Redefine your walls with the Archistra wall panel collection.

Transform your space with our exquisite Archistra wall panel collection. Crafted using polyurethane, with precision and artistic flair, these panels redefine design, seamlessly blending artistry & architecture.

Choose from a diverse range of patterns, textures, and colors to suit your aesthetic preferences. Whether you seek a contemporary focal point or a timeless elegance, Archistra offers a versatile solution.

Ultra lightweight, hassle free installation and maintenance, these panels effortlessly adds a touch of sophistication and personality to your living spaces.





**ACH-10** SERIES

ACH-20 SERIES

ACH-40 SERIES

1

# ACH-10 series




Coverage (Per box) | Pieces (Per box)
2.88 sqm | 4 pcs

Max. Weight (ACH-1001 - 1006) **2.2 kg** (Per Piece) | **11.5 kg** (Per box)

Max. Weight (ACH-1051) **3.3 kg** (Per Piece) | **13.3 kg** (Per box)

\* Please allow a ± 5% tolerance for product size, weight and colour.

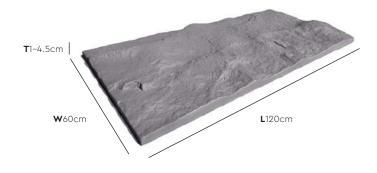











## ACH-20





Coverage (Per box) | Pieces (Per box)
2.16 sqm | 3 pcs

Max. Weight (ACH-2001 – 2006) **2.8 kg** (Per Piece) | **11.5 kg** (Per box)

Max. Weight (ACH-2051) **3.9 kg** (Per Piece) | **11.8 kg** (Per box)

\* Please allow a ± 5% tolerance for product size, weight and colour.

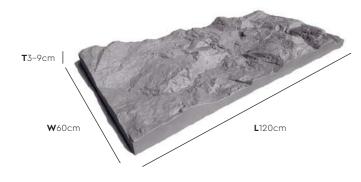

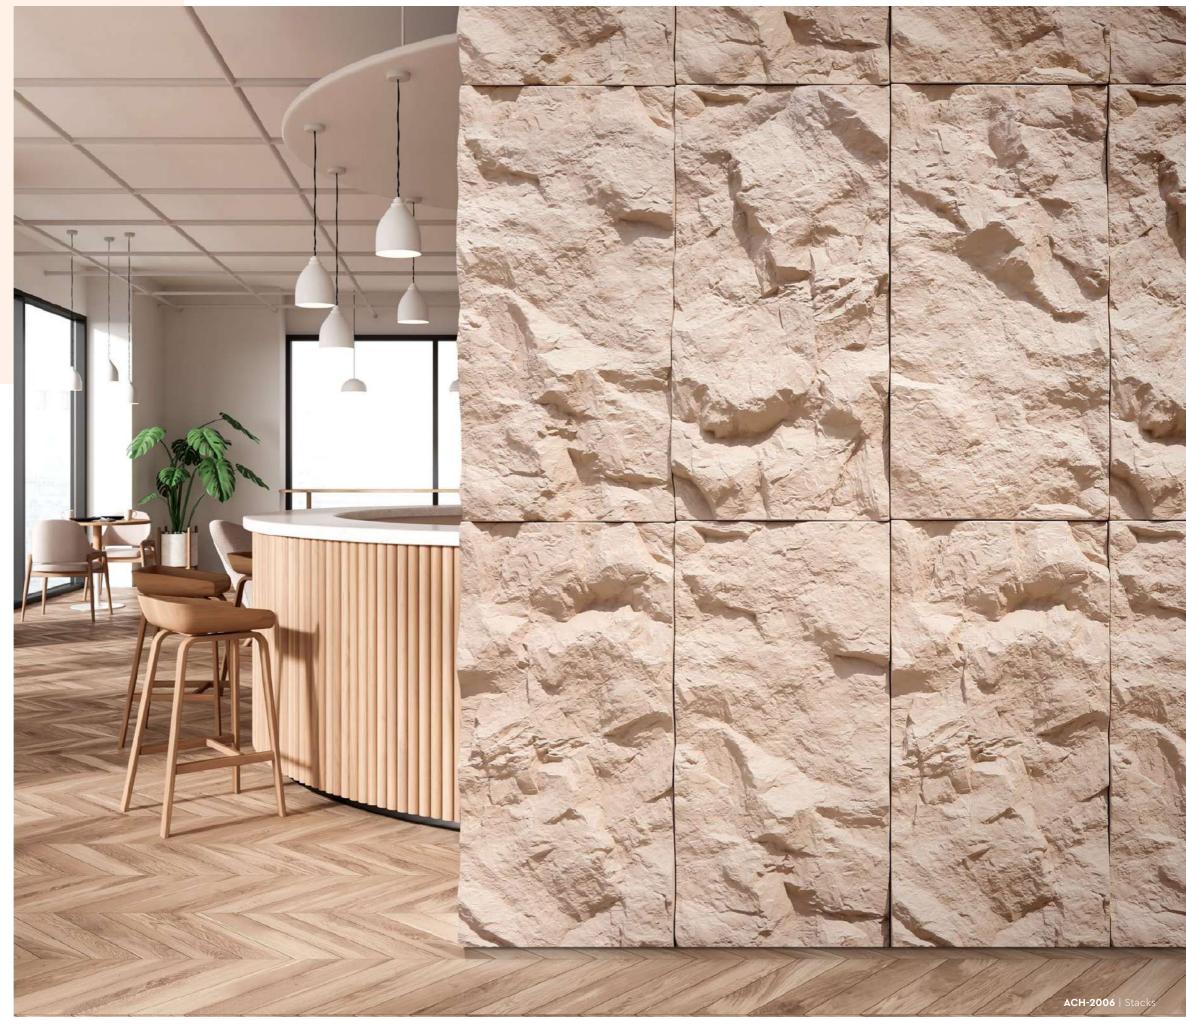












Coverage (Per box) | Pieces (Per box)
2.88 sqm | 4 pcs

Max. Weight (ACH-4001 - 4006) **2.0 kg** (Per Piece) | **11.5 kg** (Per box)

Max. Weight (ACH-4051) **3.1 kg** (Per Piece) | **13.0 kg** (Per box)

\* Please allow a ± 5% tolerance for product size, weight and colour.

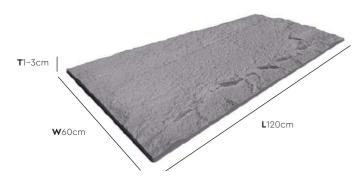









ACH-4003 | Stacks

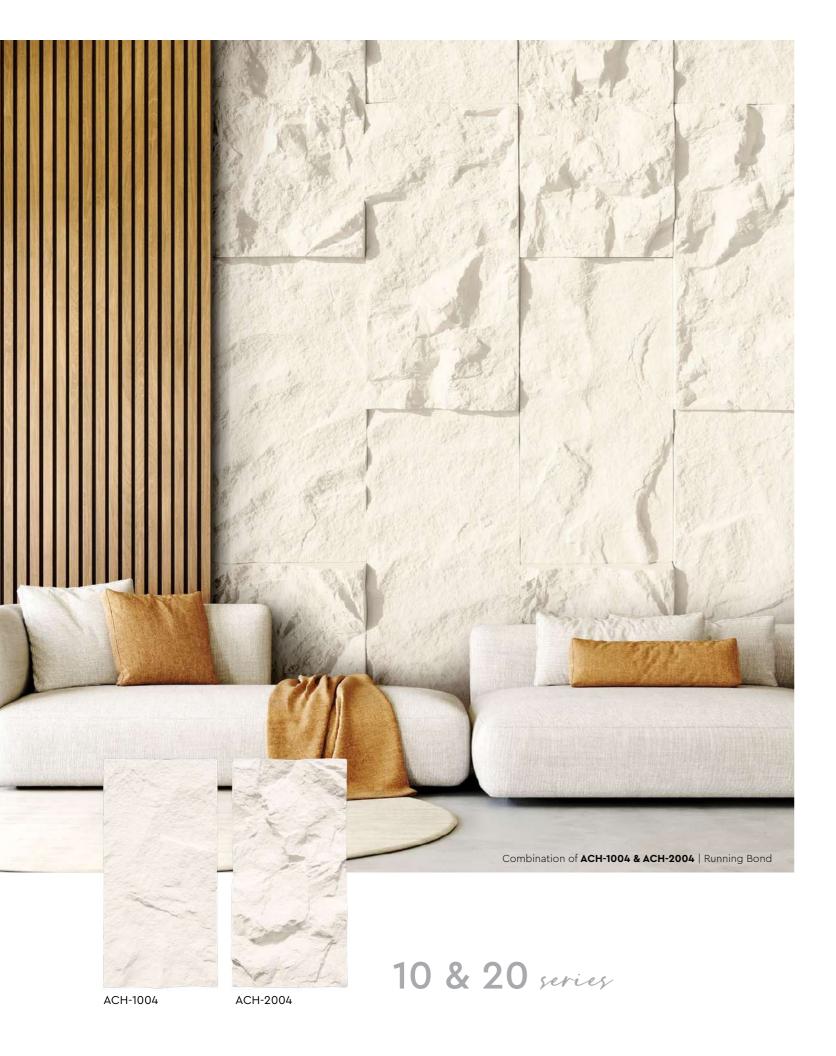


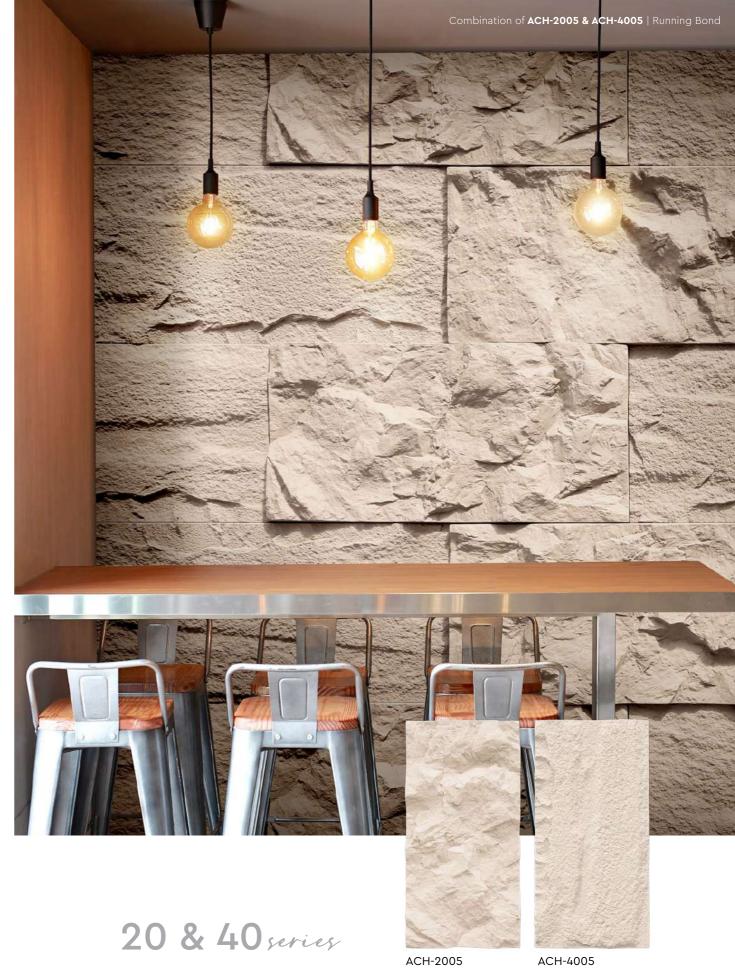





## Layout Options

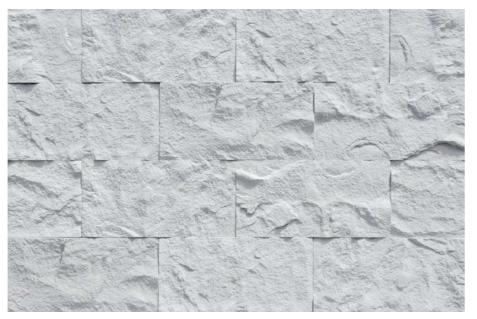

**Running Bond** 



Stacks



Random




## **Installation Instructions**

### Step 1 - Surface Preparation




Ensure your wall surface is non-wavy, dry, and solid.


If your surface is too wavy for the panels to be applied in flatly, a wooden frame can be built as a backing for the panels.



### Step 2 - Layout Planning

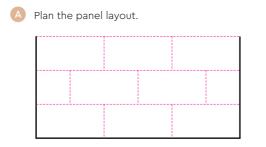

B Some panels may need to be trimmed to fit your wall dimensions.




Sand the trimmed part with sand paper and touch up with Archistra




24


Ensure the whole part is coated & fully dried.

### Step 3 - Panel Application





Install the panels working from the bottom upwards. The use of a leveler is recommended.

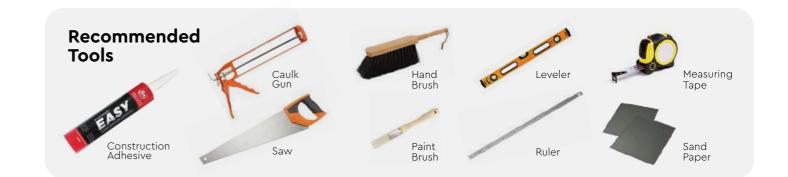



## **TECHNICAL SPECIFICATIONS**

Series		ACH-10	ACH-20	ACH-40
Dimension (cm)		<b>L</b> 120 x <b>W</b> 60 x <b>T</b> 1-4.5	<b>L</b> 120 x <b>W</b> 60 x <b>T</b> 3-9	<b>L</b> 120 x <b>W</b> 60 x <b>T</b> 1-3
Coverage Per Box (sqm)		2.88	2.16	2.88
Pieces Per Box		4	3	4
Weight (kg	)			
kg/piece	(SP) - ACH-10/20/40 (01 - 06)	2.2	2.8	2.0
kg/piece	(SGC) - ACH-10/20/40 (51)	3.3	3.9	3.1
Max. kg/bo	ox (SP) - ACH-10/20/40 (01 - 06)	11.5	11.5	11.5
Max. kg/bo	ox (SGC) - ACH-10/20/40 (51)	13.3	11.8	13.0

- Data of weight presented is the maximum weight for every piece & box respectively.
   Please allow a ± 5% tolerance for panel size, weight and colour.
- \* Product may vary in colour due to lighting conditions and printing. We suggest you examine product samples before ordering.



## Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off.

It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

Surface Dry: 1 Substrate 6.5 - 8.5 Temperature: Hard Dry : 5 m²/l/coat Recoating : 5 23°C - 26°C

- Excellent alkaline resistance to prevent efflorescence.
- · Good for new walls and repainting.
- · Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- · Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

### Suitable for:

- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

Nozzle	Spray Angle Degree	Pressure
<b>1.8 - 2.0</b> mm	65° - 80°	<b>210</b> psi/150kg/cm <sup>2</sup>

25 26