





WALL FINISH PROFESSIO NALS SIA · THAI



BRICK & STONE VENEER • TEXTURED PAINT • KASTPANEL • ECES • TEXTURE COATING • PEBBLE STONE COATING



nuhaus.org

Of nuhaus_brunei Hotline : +673 730 6870 | 875 9880

Photos of the products shown in this catalogue may vary in color due to lighting condition & printing. We suggest you examine actual product samples before ordering.

AS-ANZ **VGCC**

SGM-E3-2403

SINCE

1977



GRANITE **EFFECT COATING**

FOR THE EXTERIOR & INTERIOR

17

SUZUKA® GRANI MULTICOLOR GRANITE EFFECT COATING

GRANILYTE Page 3 - 8

GRANITTO Page 9 - 22



SUZUKA[®] Grani Multicolor vs. Real Granite

Factors	Suzuka Grani Multicolor (SGC & SGM)	Real Granite	
Installation Time	Quick	Slow	
Installation Ease	Simple	Difficult & requires extensive set-up	
Installation Cost	Economical	Expensive	
Material Cost	Economical	Expensive	
Colour Control	Yes	No	
Environmental-Friendliness	Non-invasive & water-based	Environmentally invasive	
Safety	No risk	Risk of loosened stones falling	
Customization	Yes	No	
Maintenance	Economical and simple	Requires replacement & colour matching	

Advantages

- One-time, multi-colour spray system
- Colours and patterns can be customized
- Resistant to stains, fungus, algae, acid and alkali
- Washable and easy to maintain

- High adhesion and anti-peeling/flaking
- Superb elasticity and is crack resistant
- Water-based and eco-friendly
- Excellent durability against weather conditions





Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off.

It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.

Coverage	Drying Time (hour)				
6.5 - 8.5 m²/l/coat	Surface Dry : 1 Hard Dry : 5 Recoating : 5	Substrate Temperature: 23°C - 26°C			

Features:

- Excellent alkaline resistance to prevent efflorescence.
- Good for new walls and repainting.
- Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

Suitable for:

- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

Nozzle 1.8 - 2.0 mm 65° - 80°

Spray Angle Degree

Pressure **210** psi/150kg/cm²

SUZUKA® GRANLYTE GRANITE EFFECT COATING



Introducing Granilyte, crafted to bring the timeless elegance and durability of natural granite look to your walls with ease. The meticulously formulated coating replicates the intricate natural beauty of granite.

Process	Material (Dilution)	Number of Coats	Time Interval Between Process	Consumption (±15%)	Tools	
1 Surface Preparation	Surface needs to be dry and free from dirt, oil, and foreign matter. Surface unevenness, including cracks, will need to be treated with cement filler.					
2 Primer	SGC – Sand Primer (Dilution: Max 3% with water)	1	4 hrs	7 – 9 m²/l	Spray Gun, Roller or Brush	
3 Texture Coat	SGC Texture Coat (Dilution: Ready to use)	1 - 2	24 hrs	0.9 – 1.3 kg/m²	Spray Gun	
4 Top Coat	SGC Topcoat (Dilution: Max 2% with water)	1	-	8 - 9 m²/l	Spray Gun, Roller or Brush	








SGC-G-701




SGC-G-703



SGC-G-705

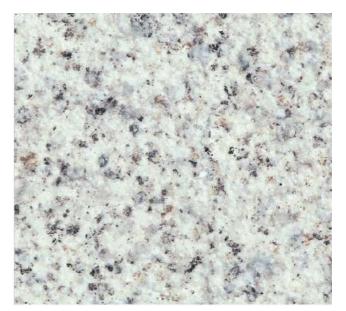

SGC-G-702

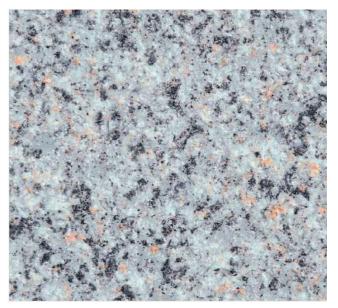

SGC-G-704



SGC-G-706





SGC-S-501

Туре






SGC-S-505








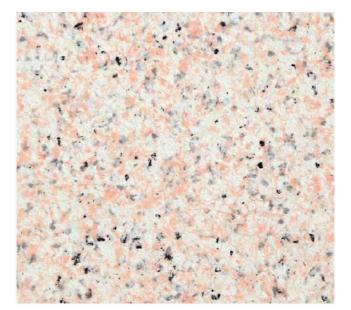

SGC-S-502

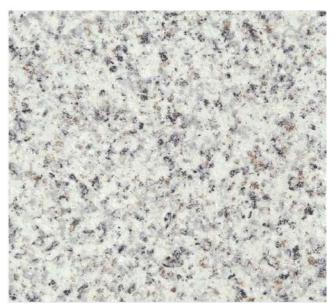

SGC-S-504



SGC-S-506

SUZUKA® GRANITE EFFECT COATING

SGM uses high-performance and environmentally-friendly technology. Its water-based coating packages itself into individual capsules, allowing each to contain its own unique formula and colour.


This creates a one-time multi-colour spray system that is not only durable, but also effective in mirroring the authentic granite texture.





SGM Application Process

Process	Material (Mixing Weight Ratio)	Number of Coats	Time Interval Between Process	Consumption (±15%)	Tools		
1 Surface Preparation	Surface needs to be dry and free from dirt, oil, and foreign matter. Surface unevenness, including cracks, will need to be treated with cement filler.						
2 Primer	EM Primer : Water 100 : 0 - 5	1	4 hrs	7 - 9 m²/l	Spray Gun, Roller or Brush		
3 Texture Coating	SGM Body Coat : Water 100 : 0 - 5	1	24 hrs	3 – 3.5 kg/m²	Spray Gun		
	SGM Base Color : Water 100 : 0 - 2	2	4 hrs	6 - 7 m²/l	Spray Gun, Roller or Brush		
	SGM Texture Coat	1 - 2	24 hrs	0.5 – 0.8 kg/m²	Spray Gun		
4 Top Coat	SGM Topcoat Satin: Water 100 : 0 - 2	1	-	8 - 9 m²/l	Spray Gun, Roller or Brush		

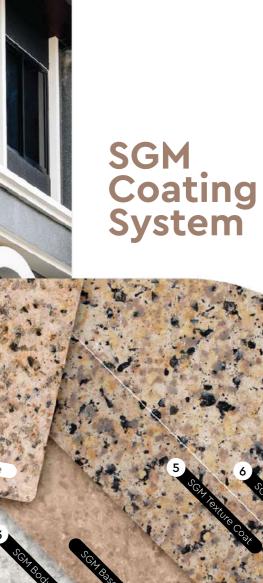






SGM-G-101




SGM-G-103

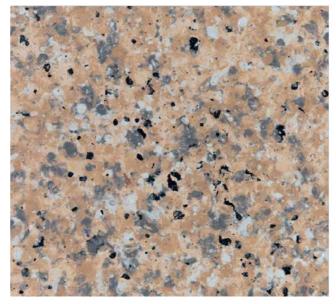

SGM-G-105




SGM-G-102

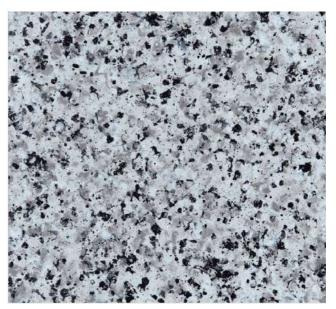

SGM-G-104




SGM-G-106

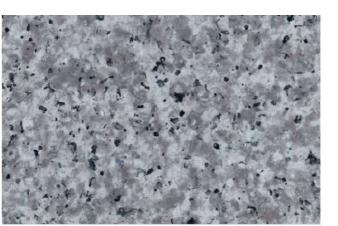





SGM-G-109

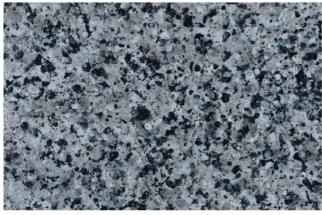

SGM-G-111



SGM-G-113



SGM-G-108




SGM-G-110



SGM-G-112




SGM-G-114

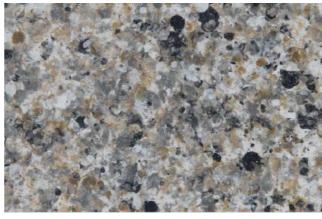

SGM-G-115




SGM-G-117

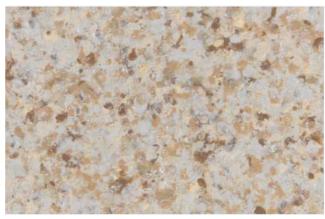

SGM-G-119



SGM-G-121

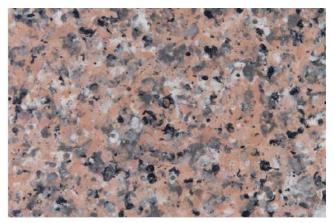


SGM-G-116



SGM-G-118



SGM-G-120

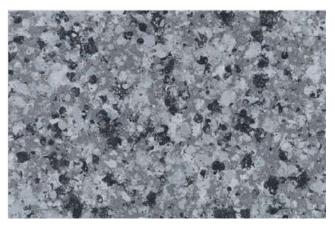

SGM-G-122







SGM-G-125




SGM-G-127



SGM-G-129



SGM-G-124

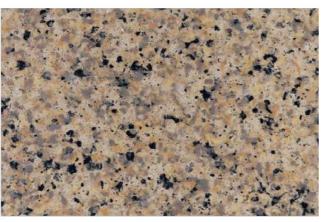

SGM-G-126




SGM-G-128




SGM-G-130






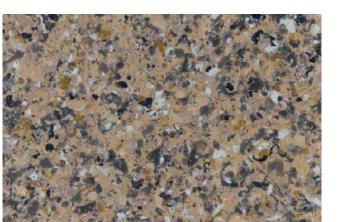



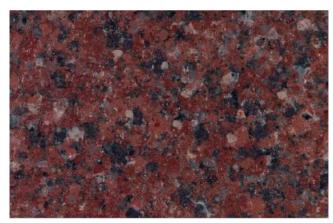

SGM-G-133

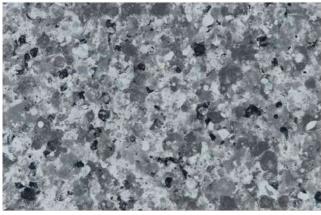

SGM-G-135



SGM-G-137



SGM-G-132



SGM-G-134



SGM-G-136




SGM-G-138



SGM-G-139




SGM-G-141

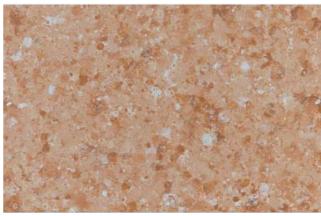

SGM-G-143




SGM-G-145

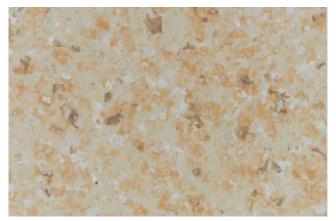

SGM-G-140



SGM-G-142

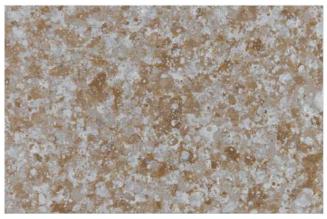


SGM-G-144




SGM-G-146





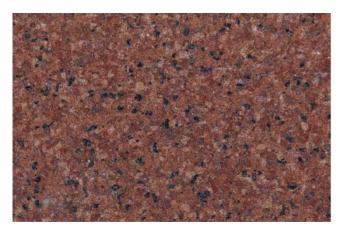




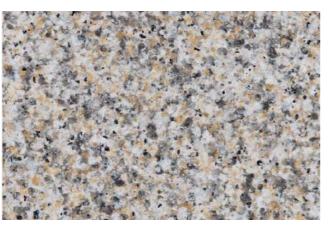


Туре

SGM-S-302

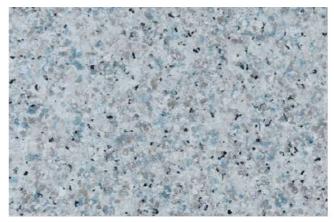

SGM-S-303

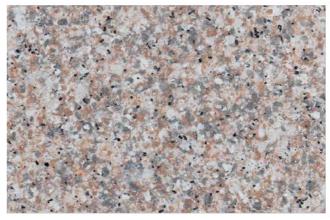


SGM-S-305



SGM-S-307




SGM-S-309

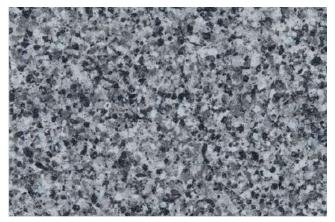


SUZUKA® GRANIT

SGM-S-304

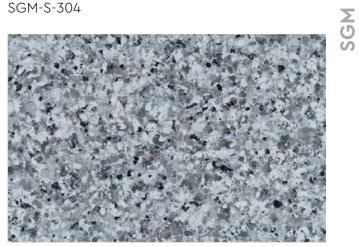


SGM-S-306

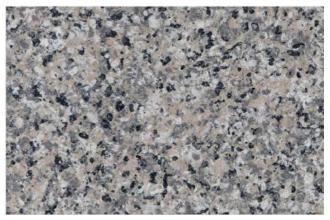


SGM-S-308




SGM-S-310

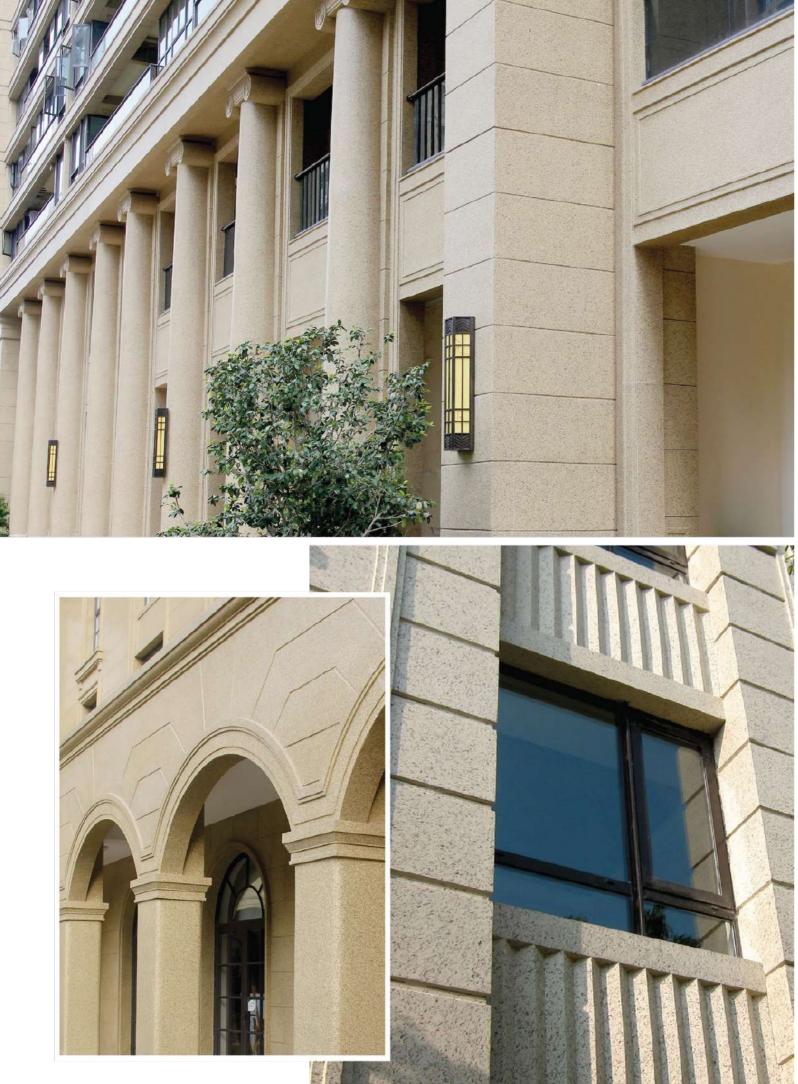


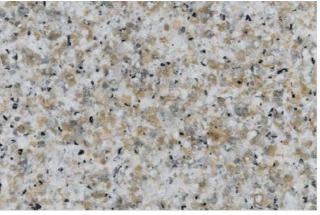

SGM-S-311

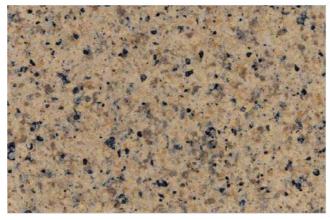


SGM-S-313

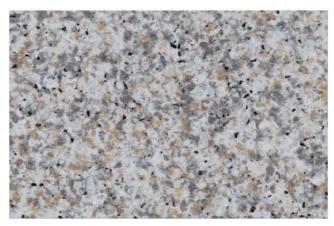

SGM-S-315



SGM-S-317

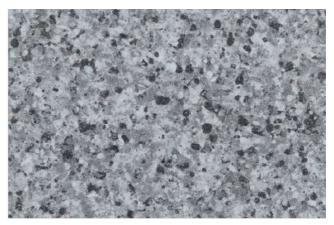

SGM-S-312



SGM-S-314



SGM-S-316



SGM-S-318